



# QA124

## Addressable Annunciator

### Characteristics


- Adopted RS485 communication mode and installed easily.
- Synchronous connection and the same operation interface as control panel.
- Security level with access code to avoid the incorrect change.
- Backlit LCD display (320 x 240) allows 6 events and total 600 digits reviewed at the same time.
- Reviewable ALARM, WIRE-BREAK, FAULT and History Log Data.

### Features

- Displayed the status of a synchronous connection with addressable control panel.
- Synchronizing function to check the events of Fire Alarm, Wire Break and Fault, shows the event type, addressable point number, location name, date and time.
- Programmable data on site via portable laptop and tablet.
- Control of Reset and the main buzzer.

### Specifications

Model	QA124
Power	AC 100~240V 50/60Hz *Others also available
Battery Capacity	24V DC 0.8Ah
Charging Voltage, Current	27.3V DC / 100~1000mA
Transmitting Signal	Signal wire S+ and S- from control panel
Transmitting Method	Digital series transmitting
Transmitting Distance	1000M@2.0mm shielded wire
Main Sound	85dB @1M
Material	1.6mm steel plate
Color	Pearl gray
Dimensions (mm) HxWxD	280x370x100mm

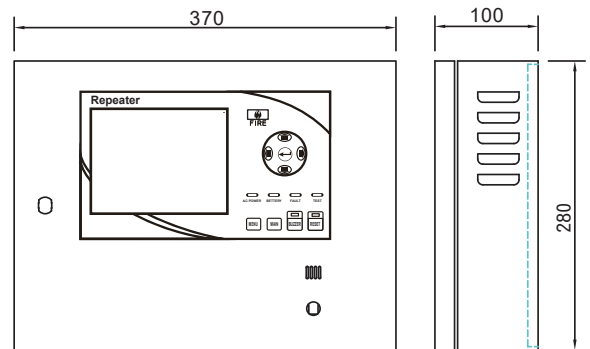

Unit:mm