

C-9401N


Conventional Sounder Strobe



Description

C-9401N conventional sounder strobe can give audible and visual notification signal when powered by 24VDC, connected with fire panel to build an alarm system.

Terminals and Installation Holes

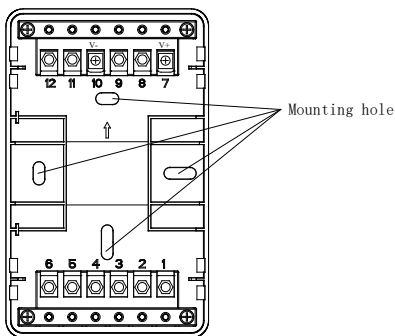

V+: 24VDC Positive
V-: 24VDC Negative

Recommended Cabling

1.0mm² or above fire cable is recommended, but subject to local codes.

Technical Specification

Operating Voltage	24VDC(20V ~ 28V)
Standby Current	0
Alarm Current	≤160mA
Flashing Frequency	1.1Hz~1.8Hz
Alarm Volume	80dB~115dB(Due front 3m horizontal (A weighted))
Operating Temperature	-10°C ~ +50°C
Relative Humidity	≤95%, non condensing
Dimension	144mm×90mm×60.5mm(with base)
Mounting Hole Distance	65mm

Ordering Information and Compatible Products

Part No.	C-9401N
Device Name	Conventional Sounder Strobe
Product No.	10106617
Compatible Products	GST102A – GST116A Conventional Panels DI-9305E Digital Single Riser Module