




DHA-2L

Line type heat detector



Dimension (mm)

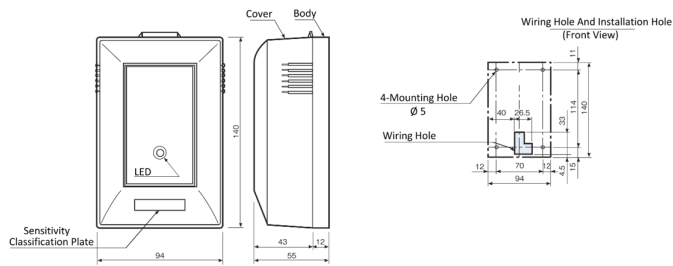

Application

The DHA-2L line type heat detectors is pneumatic detectors when the ambient temperature increases in the event of fire, the volume of heated air also expands. Air-filled sensing tubes transmit this pressure increase to a sensor in the tube terminal processor. The system triggers an alarm as soon as a defined limit is exceeded.

Specification

Type	Rate of Rise Line Type
Model	DHA-2L
Detector Operation	Pneumatic Tube Type Pneumatic Expansion Type
Alarm Current	100mA @24Vdc
Operating Voltage	8.5Vdc – 30Vdc
Operating Temp. Range	-10°C – 50°C
Pneumatic Tube length	20m – 100m The Outside Diameter 2mm The Inside Diameter 1.4mm
Material Body .Cover	Modified Polycarbonate
Color	White Ivory
Weight	Approx. 400g
Country of Origin	Japan
Approval	JFEII
Accessory	AK-M Pneumatic Tube (With Messenger Wire)



Caution: Be careful during transportation . Vibration or shock can cause failure of the device operation.

HOCHIKI ASIA PACIFIC PTE. LTD.

82 Ubi Ave 4 #06-02
Edward Boustead Centre, Singapore 408832
TEL: 65-6841-9728 | FAX: 65-6841-9781
URL : www.hochikiasiapacific.com

HEAD OFFICE

10-43 Kamiosaki 2-Chome.
Shinagawa-Ku, Tokyo 141-8660 Japan
TEL: 81-(3)-3444-4116 | FAX: 81-(3)-3444-4167
URL : www.hochiki.co.jp